


EINE SEITE AUSSENGEWINDE, VERPRESST, ANDERE SEITE ENDHÜLSE MIT SENKKOPF, VERPRESST
ONE SIDE EXTERNAL THREAD SWAGED, OTHER SIDE COUNTERSUNK HEAD END STOP SWAGED

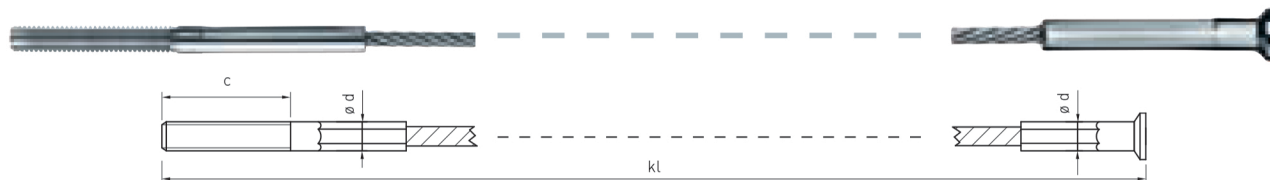

Artikelnummer Part number	ø Seil ø rope	Sk	Gewinde Größe x Länge c Thread size x length c	ø d	kl min	kN
IK 160-0200	2	7 x 7	M5 x 30	5	120	2,2
IK 160-0201	2	7 x 7	M5 x 60	5	140	2,2
IK 160-0300	3	7 x 7	M6 x 30	6	140	5
IK 160-0301	3	7 x 7	M6 x 60	6	170	5
IK 160-0400	4	7 x 7	M6 x 30	7	150	8,9
IK 160-0401	4	7 x 7	M6 x 60	7	180	8,9
IK 160-0500	5	7 x 7	M8 x 30	8	170	14
IK 160-0501	5	7 x 7	M8 x 60	8	200	14
IK 160-0600	6	7 x 7	M10 x 30	10	190	20
IK 160-0601	6	7 x 7	M10 x 60	10	220	20
IK 160-0800	8	7 x 7	M12 x 80	13	300	35

kN = Bruchkraft_kN = breaking load

All dimensions in millimeters.