


BEIDE SEITEN MIT AUSSENGEWINDE F30 UND AUFGEDREHTER LINSENKOPFHÜLSE
BOTH SIDES WITH EXTERNAL THREAD F30 AND SWAGELESS-ON RADIUS END STOP

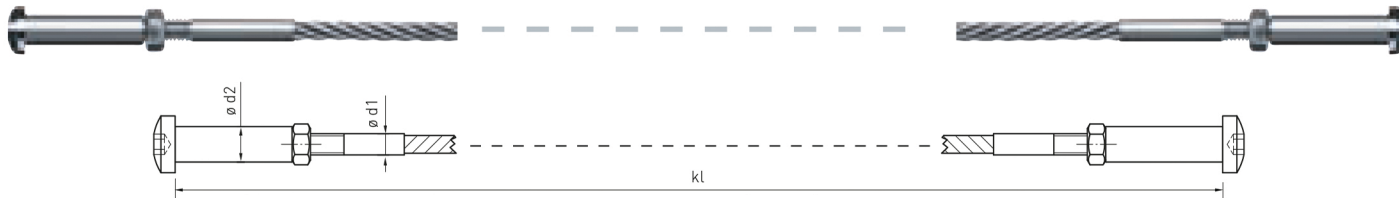

Artikelnummer Part number	$\varnothing$ Seil $\varnothing$ rope	Sk	Gewinde Thread	Spannweg Adjustment	$\varnothing d1 \begin{smallmatrix} +0,2 \\ 0 \end{smallmatrix}$	$\varnothing d2$	kl min	kN
IK 170-0400	4	7 x 7	M5	+6 -24	5	7	270	7,1
IK 170-0500	5	7 x 7	M6	+6 -22	6	8	280	11
IK 170-0600	6	7 x 7	M8	+8 -26	8	10	290	16

kN = Bruchkraft_kN = breaking load

All dimensions in millimeters.