


BEIDE SEITEN MIT AUSSENGEWINDE F30 UND AUFGEDREHTER SENKKOPFHÜLSE
BOTH SIDES WITH EXTERNAL THREAD F30 AND SWAGELESS-ON COUNTERSUNK END STOP

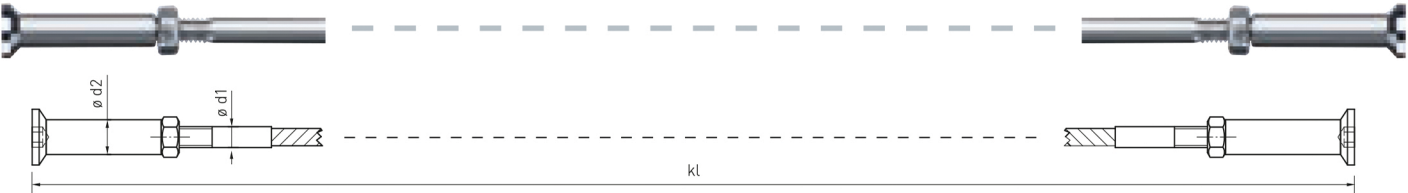

Artikelnummer Part number	$\varnothing$ Seil $\varnothing$ rope	Sk	Gewinde Thread	Spannweg Adjustment	$\varnothing d1^{+0,2}_0$	$\varnothing d2$	kl min	kN
IK 180-0400	4	7 x 7	M5	+6 l -24	5	7	270	7,1
IK 180-0500	5	7 x 7	M6	+6 l -22	6	8	280	11
IK 180-0600	6	7 x 7	M8	+8 l -26	8	10	290	16

kN = Bruchkraft_kN = breaking load

All dimensions in millimeters.