


BEIDE SEITEN MIT AUSSENGEWINDE F30 UND AUFGEDREHTEM KUGELKOPF
BOTH SIDES WITH EXTERNAL THREAD F30 AND SWAGELESS-ON BALL HEAD

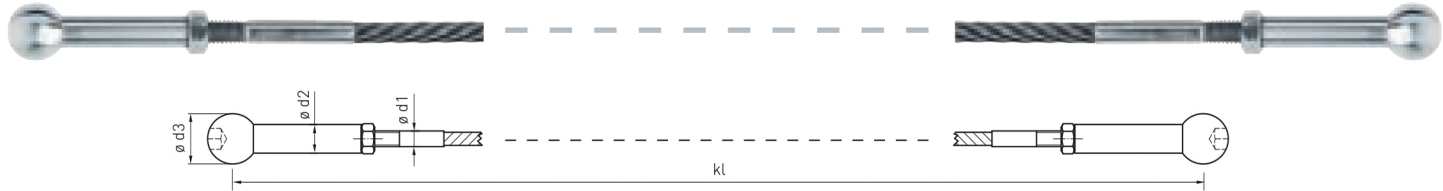

Artikelnummer Part number	$\varnothing$ Seil $\varnothing$ rope	Sk	Gewinde Thread	Spannweg Adjustment	$\varnothing d1^{+0,2}_0$	$\varnothing d2$	$\varnothing d3$	kl min	kN
IK 190-0300	3	7 x 7	M4	+4 -15	4	6	14	260	4,0
IK 190-0400	4	7 x 7	M5	+5 -20	5	7	14	270	7,1
IK 190-0500	5	7 x 7	M6	+5 -20	6	8	14	280	11

kN = Bruchkraft_kN = breaking load

All dimensions in millimeters.