


BEIDE SEITEN CS-ÖSE MIT INNENGEWINDE, VERPRESST_BOTH SIDES CS-EYE WITH INTERNAL THREAD, SWAGED

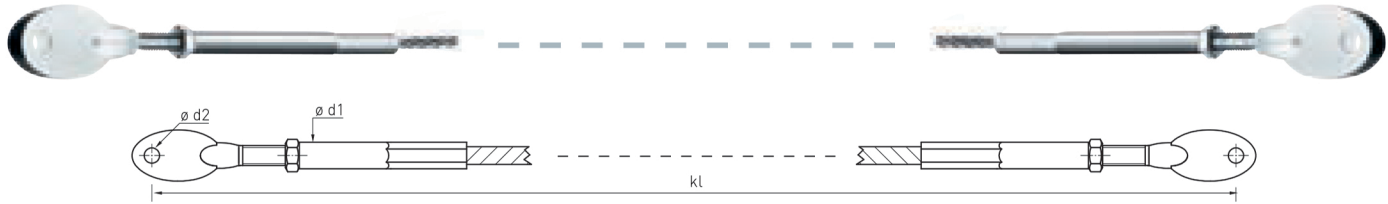

| Artikelnummer Part number | ø Seil ø rope | Sk | Gewinde Thread | Spannweg Adjustment | ø d1 | ø d2 | kl min | kN |
|------------------------------|------------------|-------|-------------------|------------------------|------|------|--------|-----|
| IK 405-0400 | 4 | 7 x 7 | M6 | +14 -22 | 8 | 6 | 352 | 8,9 |
| IK 405-0500 | 5 | 7 x 7 | M6 | +14 -22 | 8 | 6 | 372 | 12 |
| IK 405-0600 | 6 | 7 x 7 | M8 | +22 -42 | 10 | 8 | 434 | 16 |
| IK 405-0800 | 8 | 7 x 7 | M10 | +22 -42 | 13 | 8 | 594 | 26 |

kN = Bruchkraft_kN = breaking load

All dimensions in millimeters.