


BEIDE SEITEN SPANNSCHLOSS MIT ÖSE, VERPRESST_ BOTH SIDES TURNBUCKLE WITH EYE, SWAGED

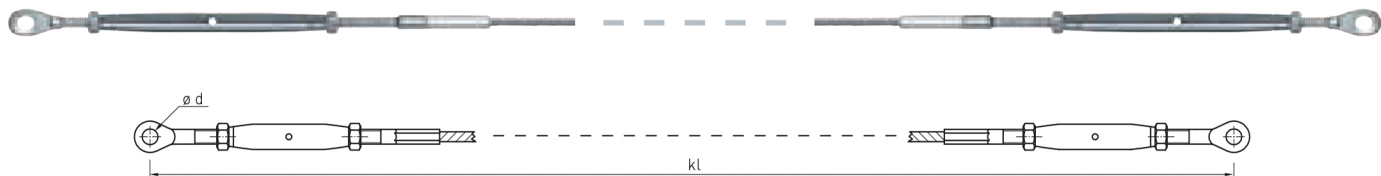

Artikelnummer Part number	ø Seil ø rope	Sk	Gewinde Thread	Spannweg Adjustment	ø d	kl min	kN
IK 420-0200	2	7 x 7	M5	+52 -86	5,5	394	2,2
IK 420-0300	3	7 x 7	M6	+56 -100	6,5	504	5
IK 420-0400	4	7 x 7	M6	+56 -100	6,5	514	8,9
IK 420-0401	4	7 x 7	M8	+68 -100	8,5	589	8,9
IK 420-0500	5	7 x 7	M8	+68 -100	8,5	609	14
IK 420-0600	6	7 x 7	M10	+60 -100	10,5	661	20
IK 420-0800	8	7 x 7	M12	+92 -140	13	905	35
IK 420-1000	10	7 x 19	M16	+96 -180	14,5	1164	52
IK 420-1200	12	7 x 19	M20	+120 -210	19,5	1335	75

kN = Bruchkraft_kN = breaking load

All dimensions in millimeters.