


EINE SEITE SPANNSCHLOSS MIT GABEL, ANDERE SEITE GABEL, AUFGEROLLT
ONE SIDE TURNBUCKLE WITH FORK, OTHER SIDE FORK SWAGED

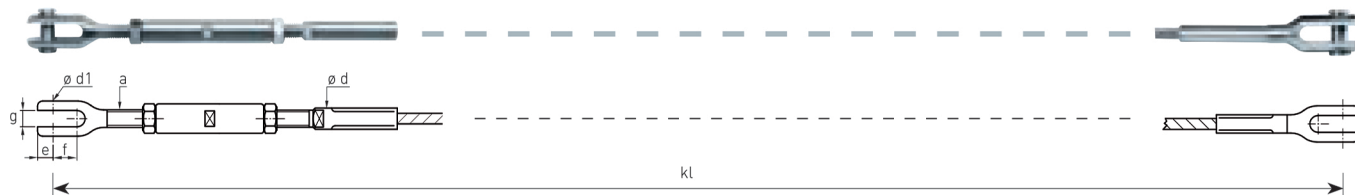

Artikelnummer Part number	ø Seil ø rope	SK	a	e	f	g	ø d	ø d1	KL min
IKZ605-0600	6	1 x 19	M10	14	18	10	12,5	10	600
IKZ605-0800	8	1 x 19	M12	16	24	12	16,1	12	800
IKZ605-1000	10	1 x 19	M14	20	29	14	17,8	16	1000
IKZ605-1200	12	1 x 19	M16	25	35	17	21,4	20	1200
IKZ605-1400	14	1 x 19	M20	28	41	20	24,9	23	1400
IKZ605-1600	16	1 x 37	M24	33	48	22	28	26	1600
IKZ605-1800	18	1 x 37	M27	38	53	28	34,5	29	1800
IKZ605-2200	22	1 x 61	M30	40	61	30	40,3	33	2200
IKZ605-2600	26	1 x 61	M36	45	71	33	45,9	36	2600

KL min = Mindestkonfektionslänge bei Spiralseil | Bruchkraft siehe Kapiteleinstieg

KL min= minimal length for strand | for breaking load, see introduction of the chapter

All dimensions in millimeters.