


# CS GABEL MIT AUSSENGEWINDE, GEHÄMMERT\_CS-FORK WITH EXTERNAL THREAD, HAMMERED

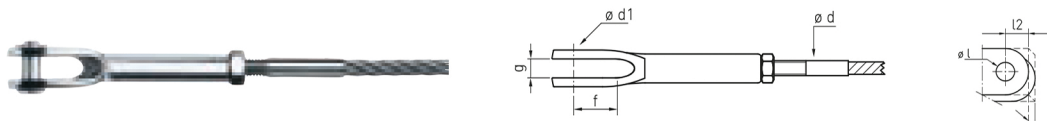

| Artikelnummer<br>Rechtsgewinde<br>Part number<br>RH thread | Artikelnummer<br>Linksgewinde<br>Part number<br>LH thread | ø Seil<br>ø rope | Gewinde<br>Thread | Spannweg<br>Adjustment | f  | g   | ø d <sup>+0,2</sup> <sub>0</sub> | ø d1 | l1 | l2 | ø l | kN  |
|------------------------------------------------------------|-----------------------------------------------------------|------------------|-------------------|------------------------|----|-----|----------------------------------|------|----|----|-----|-----|
| 346-0400                                                   | 345-0400                                                  | 4                | M5                | +15   -17              | 14 | 6,5 | 5                                | 6    | 6  | 9  | 6,5 | 8,9 |
| 346-0500                                                   | 345-0500                                                  | 5                | M6                | +15   -17              | 14 | 6,5 | 6                                | 6    | 6  | 9  | 6,5 | 14  |
| 346-0600                                                   | 345-0600                                                  | 6                | M8                | +15   -24              | 19 | 8,5 | 8                                | 8    | 8  | 12 | 8,5 | 20  |
| 346-0800                                                   | 345-0800                                                  | 8                | M10               | +15   -24              | 19 | 8,5 | 10                               | 8    | 8  | 12 | 8,5 | 35  |

Werkstoff 1.4404 | Nicht geeignet für Spiralseile 1x19 | kN = Bruchkraft\_Material AISI 316L | Not suitable for strands 1x19| kN = breaking load

All dimensions in millimeters.